

SANDIVAC



NOW
Available in
Hi Speed 350 RPM
Low Speed 192 RPM
versions ...

ROLLVAC
ROLLVAC

ESTABLISHED 1949

ISSA
MEMBER

PROUDLY MADE IN AUSTRALIA

VACUUM SANDING SAVES TIME



QUALITY SANDING WITH VACUUM FEATURE SAVES TIME AND MONEY

The **Polivac Rotary Suction Sander** has an international reputation as the most efficient and reliable floor sander in its price range.

The **Sandivac** is powered by a heavy duty 4 pole electric motor to offer the performance and strength required to satisfy the rigorous demands of floor sanding applications.

A patented off-set motor position ensures that starting torque is counter balanced and therefore provides the operator with an easy-to-use, well balanced machine that can be used for prolonged periods without operator fatigue.

Upon turning off the vacuum motor, the **Sandivac** can be used for scrubbing and stripping applications, making this machine both practical and versatile.

As with all **Polivac** machines, the **Sandivac** is supplied with all necessary accessories to start work. Standard with this unit is the Instalok Pad Holder, pad, sanding disc and Kwik Grip.

Long-life and ease of service is built into every **Polivac** machine and combined with it's outstanding features, the **Sandivac** is a cost-effective unit for today's floor maintenance requirements.


SPECIFICATIONS

MODEL:	SV25	SV30*
MOTOR:	SV25	1445 RPM, 1.1Kw, 50Hz, 240 volt, 4 pole, 7.3 Amps
	SV30*	2800 RPM, 1.5Kw, 240 volt, 2 pole, 9.8 Amps
DRIVE:	GEARBOX - POLIDRIVE single reduction helical gears running with deep grooved ball-races sealed and oil filled. Featuring the exclusive POLIDRIVE 2 YEAR WARRANTY	
DRIVE PAD SPEED:	192 rpm	350 rpm*
DRIVE PAD SIZE:	40cm	
HANDLE:	Adjustable	
VACUUM:	300watt by-pass motor, replaceable fan blades and large capacity dust collection cloth bag	
LEAD TYPE:	15mt heavy duty orange flexible with built-in neon safety indicator.	
WEIGHT:	39kg	



◀ **Floating skirt assembly** entraps dust and eliminates the need for secondary dusting. Powder coated base for durability with exclusive built in carry handle. Large diameter wheels allow easy transportation and handling.

▶ **A totally enclosed gearbox** houses the bronze helical gears which transmit drive positively and quietly. This eliminates contamination from dust and chemicals and keeps going while belt and pulley systems have given up.

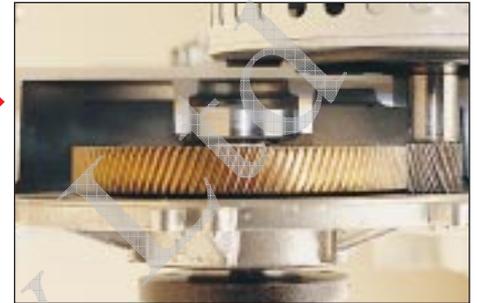

◀ **Positively Locking Clutch System** holds drive board in place and allows easy fitting and removal. Drive board offers quick change over of sanding discs as required for various applications.

▶ **The large flow through passage** of the vacuum system will allow all types of sanding debris to pass through into the large capacity collector bag. Fan blades are easily removed for periodic maintenance or replacement.



◀ **Fully adjustable heavy duty handle** fitted with safety triggers. Contoured grips reduce operator fatigue and provide ease of handling.

PROUDLY AUSTRALIAN MADE AND OWNED



Quality
Endorsed
Company
ISO 9002
Lic. QEC10553
Standards Australia

POLIVAC

