

## Clean work is important.

Clean work is important: to protect health, to make a good impression with customers, and to keep everything running smoothly for precise working results. To achieve this, thorough final cleaning is not enough; you also need effective dust extraction as the power tool is being used. Especially when working with stone, masonry, mortar, concrete, screed, plaster etc., the dust released includes sand particles containing quartz (silicon dioxide) in respirable form. Such dust is classified as harmful to health. You should therefore always work with a tested and approved dust extractor or with a safety vacuum device.



### Technical highlights

- ▶ Gross capacity = net capacity! Use of the full container volume saves you having to empty the container too often.
- ▶ No unnecessary interruptions in your work: with automatic cleaning, the main filter no longer needs to be cleaned by hand. (For CTL/CTM 36 AC)
- ▶ Professional impression: with efficient dust extraction you won't leave any unnecessary mess behind at your customer's premises, even with large amounts of dust
- ▶ Effective health protection by efficient dust extraction

### CTL MINI/MIDI

#### CTL MINI/MIDI: The on-site dust extractor – compact and light.

The new MINI/MIDI mobile dust extractors are the ideal companions when on the move. For small to medium amounts of dust.

>>> from page 54



### CT 17 E

#### CT 17 E: The small all-purpose vacuum.

The compact extractor with a little extra capacity for cleaning work on construction sites. For small to medium amounts of dust.

>>> from page 55



### CTM/CTL 36 E AC HD

#### CTM/CTL 36: The tough dust extractor for construction work.

Designed for use with electric power tools with high rates of material removal, with automatic cleaning for constantly high suction power. For large amounts of (fine) dust.

>>> from page 56



- 3-year guarantee
- Repair service
- 10-year spare parts availability
- Application advice for users



## The new CTL MINI/MIDI mobile dust extractors – ideal companions when on the move.

Increased storage space in the hose garage while maintaining a compact size overall, even simpler connection with the SYS T-LOC system, and also higher-than-ever suction power.

The new CTL MINI / MIDI continues to be what it always was: the first choice for on-site fitting jobs, installations and renovation jobs.

- ▶ A compact wet/dry extractor with 10 l (MINI) or 15 l (MIDI)
- ▶ Container capacity for work with small to medium amounts of dust and dirt, for dust of dust class L (European standard), with innovative design principle for full capacity utilisation
- ▶ Storage compartment for replacement filter bag
- ▶ Economical thanks to optimum usage of filter bag capacity in the dust container
- ▶ Suction power adjustment
- ▶ Brake to keep the unit safely in place on site and in your vehicle
- ▶ Anti-static package prevents electrostatic discharge



Technical specifications	CTL MINI/MIDI
Power consumption	1,200 W
Airflow max.	3,700 l/m
Vacuum	24,000 Pa
Container capacity	10/15 l
Filter surface area, cartridge	4,600 cm <sup>2</sup>
Maximum appliance socket load	2,400 W
Mains cable	7.5 m
Weight	8.7 kg / 9 kg

Package contents | order numbers from page 58

## CTL MINI/MIDI

## The specialist for cleaning up the workshop or garage – the CLEANTEC CT 17 E.

Ideal for cleaning of the office, garage, vehicle and construction site. Also suitable for vacuuming water.

- ▶ Maximum utilisation of filter bag capacity due to innovative design principle
- ▶ High suction performance and flow rate due to powerful single-stage turbine
- ▶ Blower function with cap on the back of the unit
- ▶ Electronic level control for vacuuming liquids
- ▶ Suction power adjustment to adapt the suction power to the task at hand

Technical specifications	CT 17 E
Power consumption	1,200 W
Airflow max.	3,700 l/m
Vacuum	24,000 Pa
Container capacity	17 l
Filter surface area, cartridge	4,600 cm <sup>2</sup>
Maximum appliance socket load	2,400 W
Mains cable	5.5 m
Weight	9.4 kg

Package contents | order numbers from page 58

## CLEANTEC



Small and compact: ideal for transportation.



Perfect companions for small to medium amounts of dust.



Suitable for both wet and dry extraction.



Compact and mobile e.g. when carrying up stairs and when climbing ladders on scaffolding.

# Mobile dust extractors for the construction site. The CLEANTEX CTL/CTM 36 E AC HD with automatic cleaning.

Use Festool dust extractors and safety vacuum devices with approval for dust classes L and M (European standard). These are tested in accordance with standard EN 60335/IEC 335 and bear the mark of conformity. By the way, effective dust extraction is not only good for your health, but also means a clear view of your work for greater safety, longer life for your sanding, cutting and drilling tools, and less effort required for clean-up.

- ▶ Automatic cleaning for constantly high suction flow
- ▶ Full container capacity of 36 l is useable due to sophisticated integration of the filter system in the head of the extractor
- ▶ Extremely sturdy design with large wheels and steel axle for use on construction sites.
- ▶ Specifically designed for use with electric power tools, with socket outlet and automatic switch-on with start-up and shut-off delay
- ▶ M-class extractors also include flow sensor technology for controlled flow rate




## CLEANTEX




Technical specifications	CT 36
Power consumption	350 - 1,200 W
Airflow max.	3,900 l/m
Vacuum	24,000 Pa
Container capacity	36 l
Filter surface area	6,318 cm <sup>2</sup>
Maximum appliance socket load	2,400 W
Mains cable	7.5 m
Weight	15 kg


Package contents | order numbers from page 58

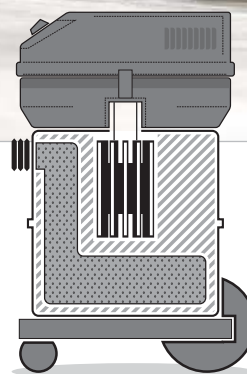

Container capacity: 33 l  
Net capacity with filter bag: 8.5 l\*

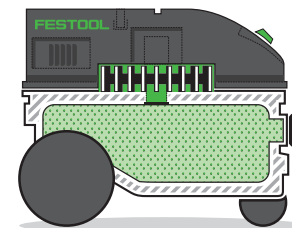

Container capacity: 36 l  
Net capacity with filter bag: 26.4 l\*










Container capacity: 17 l  
Net capacity with filter bag: 17 l\*

\* Mixed dust on construction sites: stone, plaster, concrete, filler, sand, ...

# Dust extraction







## Versions, system accessories




Mobile dust extractor package contents			
Product	Description	Order no.	
<b>Mobile dust extractor MINI/MIDI</b>			
	<b>CTL MINI</b> Suction hose Ø 32/27 x 3.5 m-AS with angular rotating adapter on extractor end, hose garage, filter bag fitted, SYS-Dock with T-LOC function, in carton Container capacity 10 l	<b>584150</b>	
	<b>CTL MIDI</b> Suction hose Ø 32/27 x 3.5 m-AS with angular rotating adapter on extractor end, hose garage, filter bag fitted, SYS-Dock with T-LOC function, in carton Container capacity 15 l	<b>584159</b>	
<b>Mobile dust extractor CLEANTEC</b>			
	<b>CT 17 E</b> Suction hose Ø 27 mm x 3.5 m with rotary connecting sleeves, two-ply filter bag, in carton Container capacity 17 l	<b>769809</b>	
	<b>CT 17 E-Set BA</b> Cleaning set D36 BA-RS, suction hose Ø 27 mm x 3.5 m with rotary connecting sleeves, two-ply filter bag, in carton Container capacity 17 l	<b>768943</b>	
	<b>CT 17 E-Set BU</b> Cleaning set D36 BU-RS, suction hose Ø 27 mm x 3.5 m with rotary connecting sleeves, two-ply filter bag, in carton Container capacity 17 l	<b>768944</b>	
<b>Dust extractor CLEANTEX</b>			
	<b>CTL 36 E AC HD</b> High performance main filter, suction hose antistatic version Ø 36/32 mm x 3.5 m AS with rotary connecting sleeves, SELFCLEAN filter bag, waste bag, accessory compartment, ComfortClean closing slide, in carton Container capacity 36 l, approval for dust class L [European standard]	<b>584169</b>	
	<b>CTM 36 E AC HD</b> High performance main filter, suction hose antistatic version Ø 36/32 mm x 3.5 m AS with rotary connecting sleeves, SELFCLEAN filter bag, waste bag, accessory compartment, ComfortClean closing slide, in carton Container capacity 36 l, approval for dust class M [European standard]	<b>*</b>	

\*Some models may not be available in Australia. Visit [www.festool.com.au](http://www.festool.com.au) to check for availability.

# Dust extraction







## Versions, system accessories



Filters, filter bags for dust extractors CTL MINI/MIDI			
	Description	Type	Order no.
	<b>Longlife filter bag</b> for CTL MINI	<b>Longlife-FIS CTL MINI</b>	<b>499703</b>
	<b>Longlife filter bag</b> for CT MIDI	<b>Longlife-FIS CTL MIDI</b>	<b>499704</b>
	<b>Main filter</b> for CT MINI/MIDI	<b>HF-CT-MINI/MIDI</b>	<b>456790</b>
	<b>Wet filter</b> for CT MINI/MIDI	<b>NF-CT MINI/MIDI</b>	<b>456805</b>
	<b>SELFCLEAN filter bag</b> for CTL MINI	<b>SCFIS-CT-MINI/5</b>	<b>498410</b>
	<b>SELFCLEAN filter bag</b> for CT MIDI	<b>SC-FIS-CT MIDI/5</b>	<b>498411</b>

Filters, filter bags for dust extractor CLEANTEC CT 17			
	Description	Type	Order no.
	<b>Filter bag</b> two-ply, qty. in pack: 5, for CT 17 E, Protocol: VCP 170/171	<b>FIS-CT 17/5x</b>	<b>769136</b>
	<b>Filter element</b> for dry extraction for CT 17 E, Protocol: VCP 170/320	<b>HF-CT 17</b>	<b>769134</b>
	<b>Wet filter</b> for extraction of liquids for CT 17 E, Protocol: VCP 170/320, VCP 171/321	<b>NF-CT 17</b>	<b>769135</b>

# Dust extraction








## Versions, system accessories

Filters, filter bags for mobile dust extractor CLEANTEX CTL 36, other accessories			
	Description	Type	Order no.
	<b>SELFclean filter bag</b> optimum utilisation of the filter bag capacity and constant high suction power thanks to Selfclean filter bag, qty. in pack: 5, for CT/CTL 36	SC FIS-CT 36/5	496186
	<b>Waste bag</b> qty. in pack: 5, for CT/CTL 36 AC; not suitable for the standard CT model (without AC)	ENS-CT 36 AC/5	496215
	<b>Main filter, high performance</b> cleaning-optimised main filter for CT/CTL AC; for CT 26/36/48, CTL 36	HF CT 26/36/48	496172
	<b>Wet filter</b> for CT 26/36/48, CTL 36	NF-CT 26/36/48	496169
	<b>Sys-Adapter</b> for connecting a Systerainer to the dust extractor, for CTM/CTL 36 E AC HD, Protocol: VCP 260/480	SYS-AP-CT 36 HD	768115
	<b>Adapter</b> for attaching the suction tube to the extractor for CTM/CTL 36 E AC HD, Protocol: VCP 260/480	AD-A-BOX	768136

Cleaning sets			
	Description	Type	Order no.
	<b>Cleaning set CONSTRUCTION</b> suction hose D 36/32 x 3.0 m AS, hand tube with suction power adjustment D 36 HR-K, stainless steel extension tubes, 3 pcs, D 36 VR-M 3x, multi-purpose nozzle with 3 interchangeable inserts D 36 BD 270, crevice nozzle D 36 FD-210, suction brush D 36 SP	D36 BA-RS	767985
	<b>Cleaning set OFFICE</b> suction hose D 36/32 x 3.0 m AS, hand tube with suction power adjustment D 36 HR-K, stainless steel extension tubes, 3 pcs, D 36 VR-M 3x, carpet nozzle D 36 TD, upholstery nozzle D 36 PD, crevice nozzle D 36 FD-210	D36 BU-RS	767987

# Dust extraction

## Versions, system accessories

Suction hoses, hose connectors			
	Description	Type	Order no.
	<b>Suction hose</b> with EW connector (for electric tools), rotating, tapered, Ø 36/32 mm, length 3 m for CTL 36, all Protocol VCP (except VCP 30)	D 36/32 x 3,0 m	768114
	<b>Suction hose, antistatic</b> with EW connector (for electric tools), rotating, tapered, Ø 32/27 mm, length 3.5 m for CTL MINI/MIDI	D32/27x3,5m-AS	499742
	<b>Suction hose, antistatic</b> with EW connector (for electric tools), rotating, tapered, Ø 36/32 mm, length 3.5 m for CT/CTL AC, all Protocol VCP (except VCP 30), optional for AC extractors	D 36/32x3,5m-AS	499725
	<b>Suction hose, antistatic</b> with EW connector (for electric tools), rotating, tapered, Ø 36/32 mm, length 5 m for CT/CTL AC, all Protocol VCP (except VCP 30), optional for AC extractors	D 36/32 x 5,0 m - AS	769163
	<b>Suction hose, antistatic</b> with EW connector (for electric tools), rotating, tapered, Ø 36/32 mm, length 7 m for CT/CTL AC, all Protocol VCP (except VCP 30), optional for AC extractors	D 36/32 x 7,0 m - AS	769140
	<b>Hose connector, antistatic</b> on electric power tool end; adapter from Ø 36 to 27 mm for CT/CTL, all Protocol VCP	DC-D 36/27 AS	768135
	<b>Angled connector, antistatic</b> on dust container end, for antistatic suction hose Ø 32/27 mm on CTL MINI/MIDI	D32/27 DAG/90°-AS	499907